

Micro-Adjustable Torque Screwdriver

An excellent tool for flexible production. This driver allows instant changes to the torque value with the easy-to-read window scale and a precise pull-to-set, push-to-lock adjustment knob. The Micro-Adjustable series includes three models ranging from 10 to 450 Ncm or 20 in. ozs. to 40 in. lbs.



Adjusting the screwdriver is simple. Just pull the adjusting knob to unlock, then turn it to the desired torque while keeping an eye on the major window scale and the minor knob scale. When the correct setting is reached push in the knob until it clicks. And it's ready to use!

High Precision Torque Screwdrivers

True to tradition of offering only the best in high precision tools, Lindstrom introduces a new generation of Torque Screwdrivers. The unique cam-over torque limiting design eliminates over-application of force, thereby reducing damages, rejects, and rework costs.

The elegant and robust Torque Screwdrivers are user-friendly designed with a comfortable shape and a non-slip grip. There are two models available, the Micro-Adjustable and the Preset Torque Screwdriver.


The Micro-Adjustable Torque Screwdriver.

A flexible tool for varied tasks. Torque is easily and accurately changed with a unique adjusting knob and an easy-to-read window scale.

Torque ranges*Prod code	
10-80 Ncm	MA 500-1
40-200 Ncm	MA 500-2
50-450 Ncm	MA 500-3
20-100 in. ozs.	MAL 500-1**
3-15 in. lbs.	MAL 500-2**
5-40 in. lbs.	MAL 500-3**
*Accuracy +/- 6%.	
**Available in US only.	



Tools shown in actual size

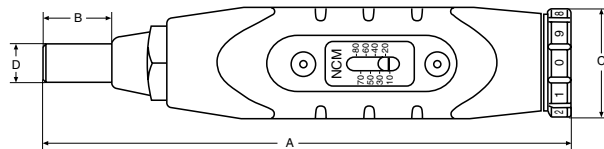

Assortment

Product code	EAN-code +731415	Torque capacity**		A		B		C		D		in.	g	
		Ncm	in. ozs./in. lbs	mm	in.	mm	in.	mm	in.	mm	in.	in.		
MA500-1	112395	10-80		138	5.43	18.2	0.72	28	1.10	9.6	0.38	1/4	195	1
MA500-2	112401	40-200		157	6.18	18.2	0.72	28	1.10	9.6	0.38	1/4	260	1
MA500-3	112418	50-450		171	6.73	18.2	0.72	32	1.26	9.6	0.38	1/4	306	1
MAL500-1*	112593		20-100 in. ozs.	138	5.43	18.2	0.72	28	1.10	9.6	0.38	1/4	195	1
MAL500-2*	112609		3-15 in. lbs.	157	6.18	18.2	0.72	28	1.10	9.6	0.38	1/4	260	1
MAL500-3*	112616		5-40 in. lbs.	171	6.73	18.2	0.72	32	1.26	9.6	0.38	1/4	306	1

* Available in US only.

** Store driver in protective case at lowest torque setting. Do not force adjusting knob below lowest setting.