
Medium Flexible Head Swab

Foam Series

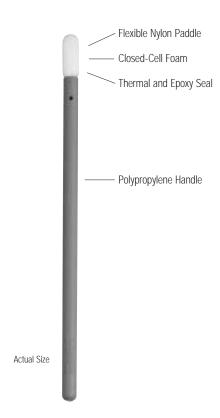

Description

The Medium Flexible Head Swab is a flexible, general-purpose swab for cleaning surfaces and recessed areas. Its closed-cell polyurethane foam head possesses excellent durability and cushioning. An internal nylon paddle provides flexible support. The round polypropylene handle enables good control and ease of use.

Features

- Polyurethane foam head over flexible nylon paddle
- Closed-cell structure
- Round polypropylene handle
- Thermal and epoxy head seal
- Soft and nonabrasive

Benefits

- Low particle and fiber generation
- Excellent strength
- Good chemical resistance

Applications

- Cleaning with solvents such as IPA
- Applying lubricants and other liquids
- Removing excess materials
- Scrubbing applications

Products

TX Number	Description	Packaging
TX709A	Medium Flexible Head	Bag-Within-A-Bag®;
	Swab	100 swabs/bag;
		2 inner bags
		of 50 swabs;
		10 bags/case

"T" Texwipe

North America

650 East Crescent Avenue Upper Saddle River, NJ 07458 DK-8200 Århus N Tel (800) TEXWIPE ext 120 (201) 327-9100 ext 120

Fax (201) 327-5945 www.texwipe.com info@texwipe.com

Europe/Middle East Skejby Nordlandsvej 307 Denmark Tel +45 87 400 220

Fax +45 87 400 222

Asia/Pacific 50 Tagore Lane #02-01/02/03 Markono Distri Centre Singapore 787494 Tel +65 6468 9433 Fax +65 6468 6772

Medium Flexible Head Swab

TX709A

Physical Characteristics		
Head material	100 ppi closed-cell polyurethane foam	
Head width	4.8 mm (0.189")	
Head thickness	4.2 mm (0.165")	
Head length	12.0 mm (0.472")	
Handle material	Polypropylene	
Handle width	4.3 mm (0.169")	
Handle thickness	4.3 mm (0.169")	
Handle length	93.0 mm (3.661")	
Total swab length	105.0 mm (4.134")	
Head bond	Thermal/Epoxy	
Handle color	Light green	
Design notes	Flexible nylon head paddle; medium handle	

Contamination Characteristics

Property	Measurement	Test Method*
Nonvolatile residue		
IPA extractant	0.24 mg/swab	TM10: Procedure for Determining the Nonvolatile Residue (NVR) Extractable from Swabs in a Given Solvent
lons		TM12: The Determination of lons in Wipers and Other Materials by Capillary Ion Analysis (CIA)
Chloride	0.15 µg/swab	
Sulfate	0.05 µg/swab	
Nitrate	< 0.01 µg/swab	
Phosphate	< 0.01 µg/swab	
Fluoride	< 0.01 µg/swab	
Potassium	0.05 µg/swab	
Calcium	0.02 µg/swab	
Sodium	0.39 µg/swab	
Magnesium	< 0.01 µg/swab	

^{*}Test procedures available upon request.